

SDS800X HD

Digital Storage Oscilloscope



Data Sheet

EN01B



SDS804X HD
SDS814X HD
SDS824X HD

SDS802X HD
SDS812X HD
SDS822X HD

Product Overview

SIGLENT's SDS800X HD series high resolution digital storage oscilloscopes are based on 2 GSa/s, 12-bit Analog-Digital Converters and front ends with excellent noise floor performance. They are available in bandwidths of 200 MHz and 100 MHz, have maximum record length of 100 Mpts, and display 2/4 analog channels + 16 digital channels mixed signal analysis ability.

The SDS800X HD series employs Siglent's SPO technology with a maximum waveform capture rate of up to 120,000 wfm/ s (normal mode, up to 500,000 wfm/s in Sequence mode), 256-level intensity grading display function plus a color temperature display mode. It also employs an innovative digital trigger system with high sensitivity and low jitter. The trigger system supports multiple powerful triggering modes including serial bus triggering. Tools such as History waveform recording, Search and Navigate functions, Mask Test, Bode Plot, Power Analysis and allow for extended waveform records to be captured, stored, and analyzed. An impressive array of measurement and math capabilities, options for a 25 MHz arbitrary waveform generator, as well as serial decoding are also features of the SDS800X HD.

The 7" display capacitive touch screen supports multi-touch gestures, with the addition of user-friendly UI design, can greatly improve the operation efficiency. It also supports mouse control, and remote web control over LAN.

Key Features


- 12-bit High Resolution
 - 12-bit Analog-Digital Convertors with sample rate up to 2 GSa/s
 - Front ends with 70 μ Vrms noise floor @ 200 MHz bandwidth
- 2/4 analog channels, up to 200 MHz bandwidth
- SPO technology
 - Waveform capture rate up to 120,000 wfm/s (normal mode), and 500,000 wfm/s (sequence mode)
 - Supports 256-level intensity grading and color temperature display modes
 - Up to 100 Mpts record length
 - Digital trigger system
- Intelligent trigger: Edge, Slope, Pulse width, Window, Runt, Interval, Dropout, Pattern, Video (HDTV supported) , Qualified, Nth edge, Delay, Setup/Hold time.
- Serial bus triggering and decoder, supports protocols I²C, SPI, UART, CAN, LIN
- Segmented acquisition (Sequence) mode, dividing the maximum record length into multiple segments (up to 80,000), according to trigger conditions set by the user, with a very small dead time between segments to capture the qualifying event
- History waveform record (History) function, the maximum recorded waveform length is 80,000 frames
- Automatic measurements on 50+ parameters, supports statistics with histogram, track, trend, Gating measurement, and measurements on Math, History and Ref
- 4 Math traces (2 Mpts FFT, addition, subtraction, multiplication, division, integration, differential, square root, etc.), supports formula editor
- Abundant data analysis functions such as Search, Navigate, Counter, Bode plot and Power Analysis
- High Speed hardware-based Mask Test function, with Mask Editor tool for creating user-defined masks
- 16 digital channels (optional)
- 25 MHz waveform generator(optional)
- 7" TFT-LCD display with 1024 * 600 resolution; Capacitive touch screen supports multi-touch gestures
- Interfaces include: USB Hosts, USB Device (USBTMC), LAN (VXI-11/Telnet/Socket), Pass/Fail, Trigger Out
- Built-in web server supports remote control over the LAN port using a web browser. Supports SCPI remote control commands. Supports external mouse and keyboard. Supports NTP.

Models and Key Specifications



Model	SDS804X HD SDS802X HD	SDS814X HD SDS812X HD	SDS824X HD SDS822X HD
Analog channels	4 (4CH Series: SDS804X HD, SDS814X HD, SDS824X HD), 2 (2CH Series: SDS802X HD, SDS812X HD, SDS822X HD)		
Bandwidth	70 MHz	100 MHz	200 MHz
Vertical resolution	12-bit		
Sample rate (Max.)	One channel mode: 2 GSa/s, Two channel mode: 1 GSa/s, Four channel mode: 500 MSa/s		
Memory depth (Max.)	One channel mode: 50 Mpts/ch, Two channel mode: 25 Mpts/ch, Four channel mode: 10 Mpts/ch		One channel mode: 100 Mpts/ch, Two channel mode: 50 Mpts/ch, Four channel mode: 25 Mpts/ch
Waveform capture rate (Max.)	Normal mode : 80,000 wfm/s; Sequence mode : 500,000 wfm/s		Normal mode : 120,000 wfm/s; Sequence mode : 500,000 wfm/s
Trigger type	Edge, Slope, Pulse width, Window, Runt, Interval, Dropout, Pattern, Video, Qualified, Nth edge, Delay, Setup/Hold time, Serial		
Serial trigger and decode(Standard)	I ² C, SPI, UART, CAN, LIN		
Measurement	50+ parameters, statistics, histogram, trend, and track supported		
Math	4 traces 2 Mpts FFT, Filter, +, -, x, ÷, ∫dt, d/dt, √, Identity, Negation, Absolute, Sign, ex, 10x, ln, lg, Interpolation, MaxHold, MinHold, ERES, Average. Supports formula editor		
Data analysis	Search, Navigate, History, Mask Test, Counter, Bode plot, and Power Analysis		
Digital channel (optional)	16-channel; maximum sample rate up to 1 GSa/s; record length up to 10 Mpts		
USB AWG module (option)	One channel, 25 MHz, sample rate of 125 MHz, wave length of 16 kpts, isolated output		
I/O	USB 2.0 Host x2, USB 2.0 Device, 10 M / 100 M LAN, Auxiliary output (TRIG OUT, PASS/FAIL), SBUS (Siglent MSO)		
Probe (Standard)	Passive probe PB470 for each channel	Passive probe PP510 for each channel	Passive probe PP215 for each channel
Display	7 TFT-LCD with capacitive touch screen (1024*600)		

Functions & Characteristics

12-bit High Resolution

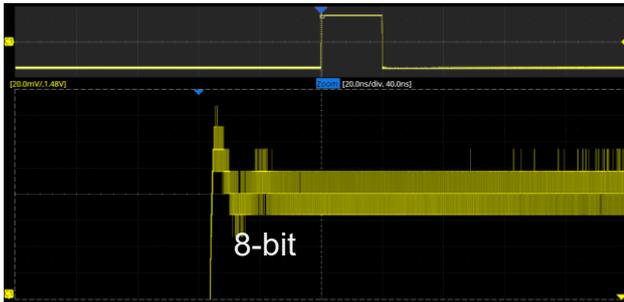

Vertical & Horizontal Zoom along with a large memory depth make the most out of 12-bit ADC resolution. Engineers can observe waveform overall and details simultaneously.

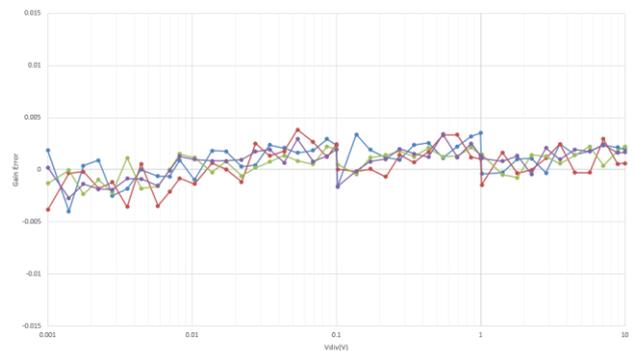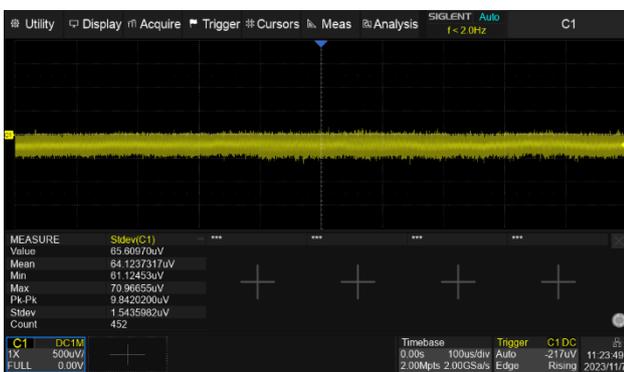

Low noise floor: Only 70 μ Vrms at 200 MHz bandwidth


0.5% DC gain accuracy

Excellent User Interface and User Experience




- 7" display with 1024x600 resolution
- Capacitive touch screen, supporting multi-touch gestures, can move or scale the waveform traces quickly by finger-touch movements, which greatly improves the operation efficiency
- Built-in WebServer supports remote control on a web page over LAN
- Supports external mouse and keyboard

Optional Font Size to Meet Different Observation Needs

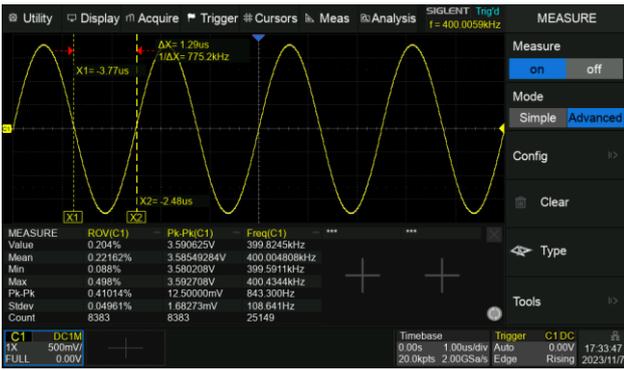


Large font size, suitable for use on devices.

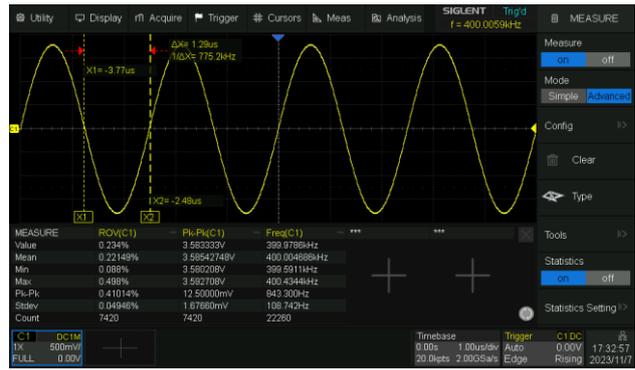


Small font size, exquisite display, suitable for large screen display scenarios such as VNC.

High Waveform Update Rate

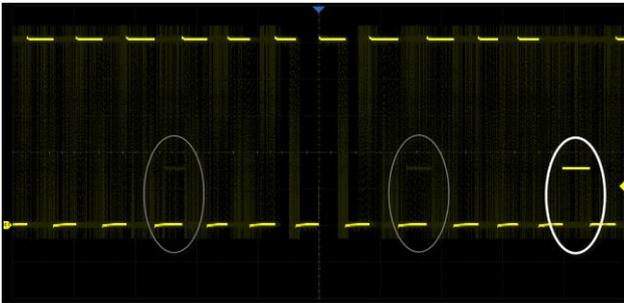


With a waveform update rate of up to 120,000 wfm/s, the oscilloscope can easily capture unusual or low-probability events. In Sequence mode, the waveform capture rate can reach 500,000 wfm/s.

Deep Record Length

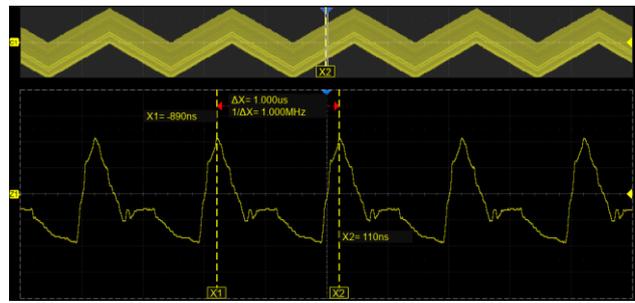


Using hardware-based Zoom technique and record length of up to 100 Mpts, users can select a slower timebase without compromising the sample rate, and then quickly zoom in to focus on the area of interest.

Multiple Trigger Functions

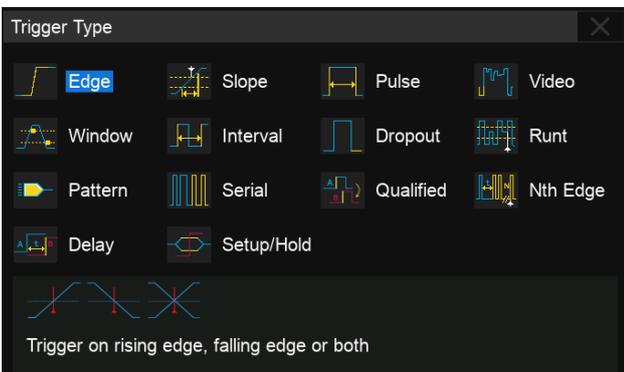


Edge, Slope, Pulse width, Video, Windows, Runt, Interval, Dropout, Pattern, Qualified, Nth edge, Delay, Setup/Hold time, and Serial trigger.

Advanced Math Function

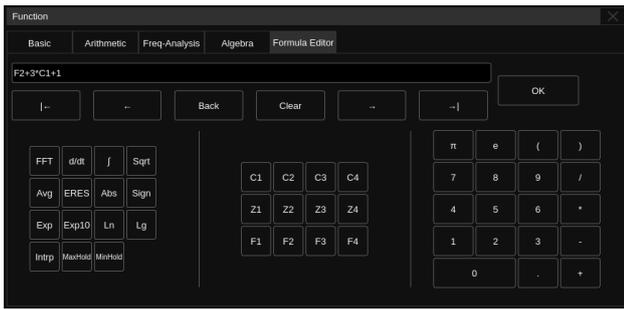


In addition to the traditional (+, -, X, /) operations, FFT, integration, differential, square root, and more are supported. Formula Editor is available for more complex operations. 4 math traces are available.

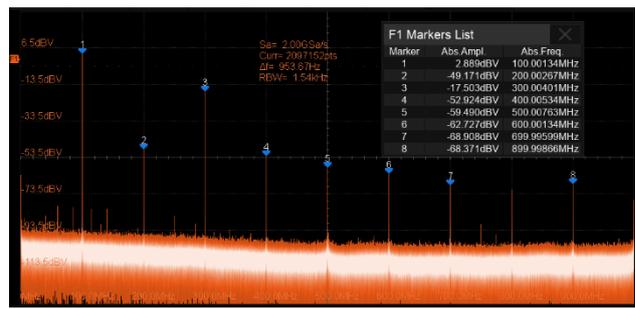


Hardware-accelerated FFT supports up to 2 Mpts operation. This provides high-frequency resolution with a fast refresh rate. The FFT function also supports a variety of window functions so that it can adapt to different spectrum measurement needs. Three modes (Normal, Average, and Max hold) can satisfy different requirements for observing the power spectrum. Auto peak detection and markers are supported.

Measurements of a Variety of Parameters

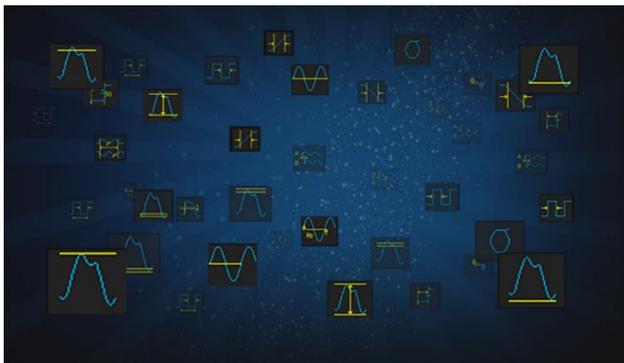

Parameter measurements include 4 categories: horizontal, vertical, miscellaneous, and CH delay providing a total of 50+ different types of measurements. Measurements can be performed within a specified gate period. Measurements on Math, Reference, and History frames are supported.


Parameter Statistics Function

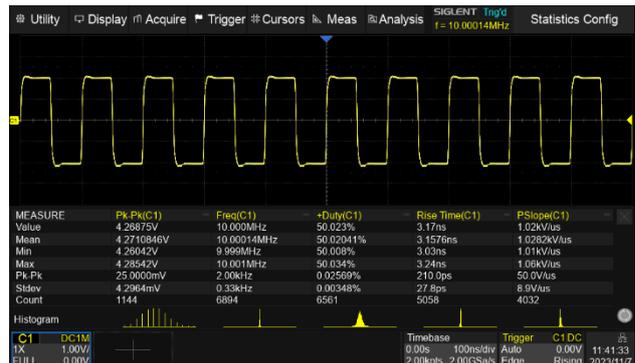

Statistics show the current value, maximum value, minimum value, standard deviation, and mean value. A histogram is available to show the probability distribution of a parameter. Trend and Track are available to show the parameter value vs. time.


For horizontal parameters such as period, all results are extracted from a frame, instead of just calculating the first one. This accelerates statistics on horizontal measurements much more and enables distribution observation in a frame using Histogram and Track.

History Mode

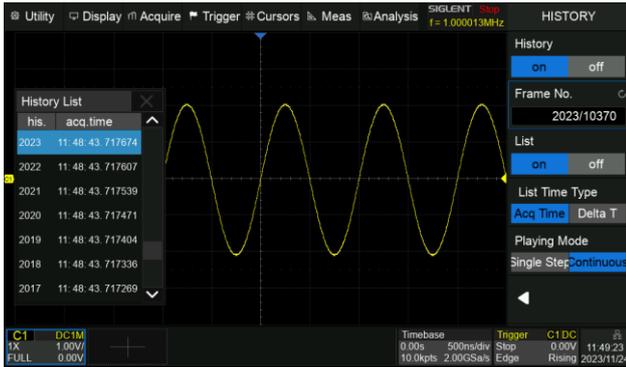


History function can record up to 80,000 frames of waveforms. The recording is executed automatically so that the customer can playback the history waveforms at any time to observe unusual events and quickly locate the area of interest using the cursors or measurements.

Sequence Mode

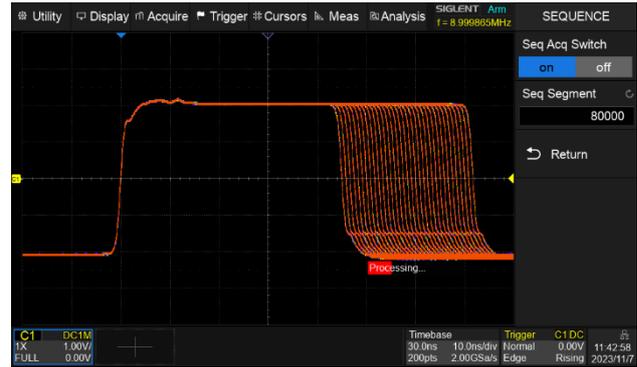

Segmented memory collection will store the waveform into multiple memory segments (up to 80,000) and each segment will store a triggered waveform as well the dead time information. The interval between segments can be as small as 2 μ s. All of the segments can be played back using the History function.

Search and Navigate

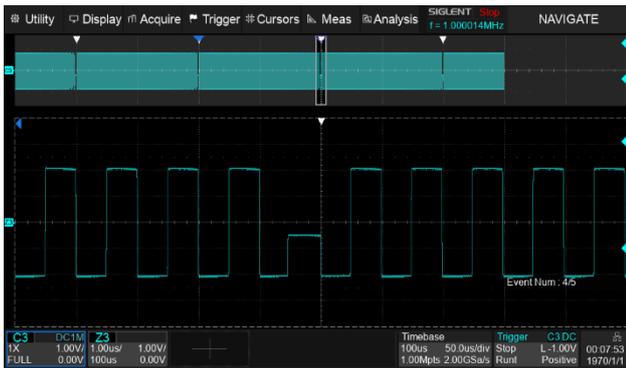

The oscilloscope can search events specified by the user in a frame. Events flagged by the Search can be recalled automatically using Navigate. It can also navigate by time (delay position) and history frames.

Serial Bus Decode




Display the decoded characters through the events list. Bus protocol information can be quickly and intuitively displayed in tabular form. I²C, SPI, UART, CAN, LIN are supported.

Hardware-based High-Speed Mask Test Function



The oscilloscope utilizes a hardware-based Mask Test function, performing up to 80,000 Pass / Fail decisions each second. It is easy to generate user-defined test templates to provide trace mask comparisons, making it suitable for long-term signal monitoring or automated production line testing.

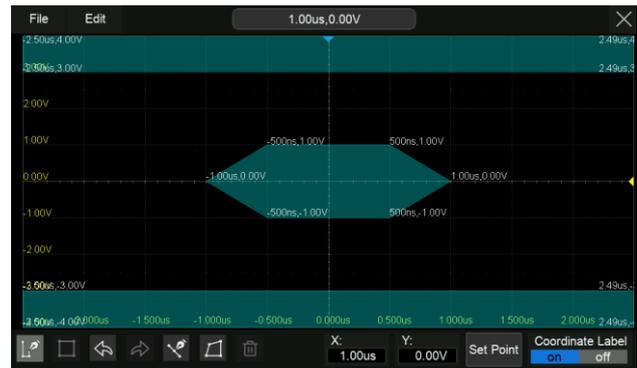

Built-in Mask Editor application helps to create custom masks.

Bode Plot




SDS800X HD can control the USB AWG module or control an independent SIGLENT SDG instrument, scan a device's amplitude and phase frequency response, and display the data as a Bode Plot. There is also a Vari-level Mode for accurately measuring Power Supply Control Loop Response (PSRR).

Power Analysis (Optional)




The Power Analysis option provides a full suite of power measurements and analysis, which greatly improve the measurement efficiency in switching power supplies and power devices design.

Digital Channels / MSO (Optional)

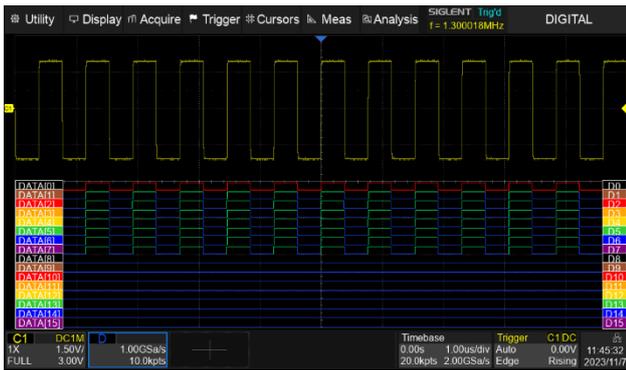

Four analog channels plus 16 digital channels enable users to acquire and trigger the waveforms then analyze the pattern, simultaneously with one instrument.

USB AWG module (Optional)

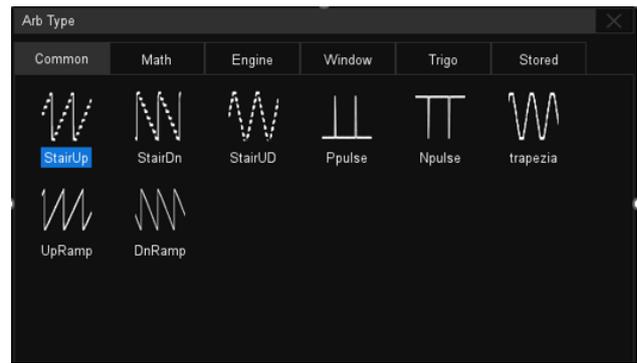

The USB waveform generator can output waveforms with up to 25 MHz frequency and ± 3 V amplitude. Six basic waveforms together with multiple types of predefined waveforms and as user-defined arbitrary waveforms are supported.

Specifications

All specifications are not guaranteed unless the following conditions are met:

- The oscilloscope calibration period is current
- The oscilloscope has been working continuously for at least 30 minutes at the specified temperature (18°C ~ 28°C)

Acquire (analog)	
Sample rate	One channel mode: 2 GSa/s, Two channel mode: 1 GSa/s, Four channel mode: 500 MSa/s
Memory depth	70M and 100M Series: One channel mode: 50 Mpts/ch Two channel mode: 25 Mpts/ch Four channel mode: 10 Mpts/ch 200M Series: One channel mode: 100 Mpts/ch Two channel mode: 50 Mpts/ch Four channel mode: 25 Mpts/ch
Waveform update rate	70M and 100M Series: Normal mode : up to 80,000 wfm/s Sequence mode : up to 500,000 wfm/s 200M Series: Normal mode : up to 120,000 wfm/s Sequence mode : up to 500,000 wfm/s
Intensity grading	256-level
Peak detect	2 ns
Sequence	Up to 80,000 segments, interval between triggers = 2 μ s min.
History	Up to 80,000 frames
Interpolation	sinx/x, x

Vertical (analog)	
Channel	4 (4CH Series: SDS804X HD, SDS814X HD, SDS824X HD), 2 (2CH Series: SDS802X HD, SDS812X HD, SDS822X HD)
Bandwidth (-3 dB) @50 Ω ^{*1}	SDS804X HD, SDS802X HD: 70 MHz SDS814X HD, SDS812X HD: 100 MHz SDS824X HD, SDS822X HD: 200 MHz
Flatness@50 Ω	DC- 10% (BW): \pm 1 dB 10%- 50% (BW): \pm 2 dB 50%- 100% (BW): + 2 dB/-3 dB
Rise time@50 Ω (typical)	Typical 5 ns (SDS804X HD, SDS802X HD) Typical 3.5 ns (SDS814X HD, SDS812X HD) Typical 1.8 ns (SDS824X HD, SDS822X HD)
Resolution	12-bit
ENOB ^{*2} (typical)	8.4-bit
Noise floor ^{*3} (rms, @50 Ω , typical, 1 mV/div)	70 μ V(Full Bandwidth)
Range	8 divisions
Vertical scale (probe 1X)	1 M Ω : 0.5 mV/div – 10 V/div

DC gain accuracy (typical)	0.5 mV/div ~ 4.95 mV/div: $\pm 1.5\%$; 5 mV/div ~ 10 V/div: $\pm 0.5\%$;
Offset accuracy	$\pm (0.5\%$ of the offset setting + 0.5% of full scale + 1 mV)
Offset range (probe 1X)	1 M Ω : 0.5 mV/div ~ 5 mV/div: ± 1.6 V; 5.1 mV/div ~ 10 mV/div: ± 4 V; 10.2 mV/div ~ 20 mV/div: ± 8 V; 20.5 mV/div ~ 100 mV/div: ± 8 V; 102 mV/div ~ 200 mV/div: ± 80 V; 205 mV/div ~ 1 V/div: ± 80 V; 1.02 V/div ~ 10 V/div: ± 400 V
Bandwidth limit	Hardware Bandwidth limit: 20 MHz, 200 MHz
Low frequency response (AC coupling -3 dB)	2 Hz (typical)
Overshoot (150 ps edge @50 Ω , typical)	10%
Coupling	DC, AC, GND
Impedance	1 M Ω : (1 M $\Omega \pm 2\%$) (17 pF ± 2 pF)
Max. input voltage	1 M $\Omega \leq 400$ Vpk (DC + AC), DC~10 kHz
SFDR	≥ 35 dBc
CH to CH Isolation (@50 Ω)	DC~Max BW: >40dB
Probe Attenuation	1X, 10X, 100X, custom

* 1: SDS800X HD has no internal 50 Ω . The external 50 Ω should be taken

* 2: 24.99 MHz input , -0.25 dBFS , 20 mV/div , 50 Ω input impedance

* 3: Use the "Stdev" measurement

Horizontal	
Time scale	70M and 100M Series: 2 ns/div ~ 1000 s/div 200M Series: 1 ns/div ~ 1000 s/div
Range	10 divisions
Display mode	Y-T, X-Y, Roll
Roll mode	≥ 50 ms/div
Skew (CH1~CH4)	< 100 ps
Time base Accuracy	± 25 ppm

Trigger	
Mode	Auto, Normal, Single
Level	Internal : ± 4.1 div from the center of the screen
Hold off range	By time : 8 ns ~ 30 s (8 ns step)
Coupling	AC DC LFRJ HFRJ Noise RJ
Coupling Frequency Response (CH1 ~ CH4)	DC : Passes all components of the signal AC : Blocks DC components and attenuates signals below 8Hz LFRJ : Blocks the DC component and attenuates the low-frequency components below 2 MHz HFRJ : Attenuates the high-frequency components above 2.4 MHz
Accuracy (typical)	CH1 ~ CH4: ± 0.2 div
Sensitivity	CH1 ~ CH4 : DC ~ Max BW : 0.6div
Jitter	CH1 ~ CH4 : <100ps
Displacement	Pre-Trigger : 0 ~ 100% memory Delay-Trigger : 0 ~ 10,000 div
Edge Trigger	
Source	CH1 ~ CH4 / AC Line / D0~D15
Slope	Rising, Falling, Rising & Falling
Slope Trigger	
Source	CH1 ~ CH4
Slope	Rising, Falling
Limit range	<, >, in range, out of range
Time range	2 ns ~ 20 s, Resolution = 1 ns
Pulse Width Trigger	
Source	CH1 ~ CH4 / D0 ~ D15
Polarity	+width, -width
Limit range	<, >, in range, out of range
Time range	2 ns ~ 20 s, Resolution = 1 ns
Video Trigger	
Source	CH1 ~ CH4
Standard	NTSC, PAL, 720p/50, 720p/60, 1080p/50, 1080p/60, 1080i/50, 1080i/60, Custom
Synchronization	Any, Select
Trigger Condition	Line, Field
Window Trigger	
Source	CH1 ~ CH4
Window type	Absolute, Relative

Interval Trigger	
Source	CH1 ~ CH4 / D0 ~ D15
Slope	Rising, Falling
Limit range	<, >, in range, out of range
Time range	2 ns ~ 20 s, Resolution = 1 ns
Dropout Trigger	
Source	CH1 ~ CH4 / D0 ~ D15
Timeout type	Edge, State
Slope	Rising, Falling
Time range	2 ns ~ 20 s, Resolution = 1 ns
Runt Trigger	
Source	CH1~CH4
Polarity	Positive, Negative
Limit range	<, >, in range, out of range
Time range	2 ns ~ 20 s, Resolution = 1 ns
Pattern Trigger	
Source	CH1 ~ CH4 / D0 ~ D15
Pattern Setting	Don't Care, Low, High
Logic	AND, OR, NAND, NOR
Limit range	<, >, in range, out of range
Time range	2 ns ~ 20 s, Resolution = 1 ns
Qualified Trigger	
Type	State, State with Delay, Edge, Edge with Delay
Qualified Source	CH1~CH4
Edge Trigger Source	CH1~CH4
Nth Edge Trigger	
Source	CH1~CH4
Slope	Rising, Falling
Idle time	8 ns ~ 20 s, Resolution = 1 ns
Edge Number	1 ~ 65535
Delay Trigger	
Source A	CH1~CH4
Source B	CH1~CH4
Slope	Rising, Falling
Limit range	<, >, in range, out of range
Time range	2 ns ~ 20 s, Resolution = 1 ns
Serial Trigger	
Source	CH1 ~ CH4 / D0 ~ D15
Protocol	I ² C, SPI, UART, CAN, LIN

I ² C	Type : Start, Stop, Restart, No Ack, EEPROM, Address & Data, Data Length
SPI	Type : Data
UART	Type : Start, Stop, Data, Parity Error
CAN	Type : All, Remote, ID, ID+Data, Error
LIN	Type : Break, Frame ID, ID+Data, Error

Serial Decoder	
Decoders	2
Threshold	-4.5 ~ 4.5 div
List	1 ~ 7 lines
Decoder type	Full duplex
I²C	
Source	CH1~CH4 / D0~D15
Signal	SCL, SDA
Address	7-bit, 10-bit
SPI	
Source	CH1 ~ CH4 / D0 ~ D15
Signal	CLK, MISO, MOSI, CS
Edge Select	Rising, Falling
Chip select	Active high, Active low, Clock timeout
Bit Order	LSB, MSB
UART	
Source	CH1~CH4/D0~D15
Signal	RX, TX
Data Width	5-bit, 6-bit, 7-bit, 8-bit
Parity Check	None, Odd, Even, Mark, Space
Stop Bit	1-bit, 1.5-bit, 2-bit
Idle Level	Low, High
Bit Order	LSB, MSB
CAN	
Source	CH1 ~ CH4 / D0 ~ D15
LIN	
LIN Version	Ver 1.3, Ver 2.0
Source	CH1~CH4/D0~D15
Baud Rate	600 bps, 1200 bps, 2400 bps, 4800 bps, 9600 bps, 19200 bps, Custom

Measurement	
Automatic Measurement	
Source	CH1~CH4, D0~D15, Z1~Z4, F1~F4, Ref, History
Mode	Simple, Advanced
Range	Screen Gated: inside screen, definable with separate Gate cursors
Custom Threshold	Upper, Middle, Lower

Vertical Parameters	Max, Min, Pk-Pk, Top, Base, Amplitude, Mean, Cycle Mean, Stdev, Cycle Stdev, RMS, Cycle RMS, Median, Cycle Median, FOV, FPRE, ROV, RPRE, Level@Trigger
Horizontal Parameters	Period, Frequency, Time@max, Time@min, +Width, -Width, 10-90%Rise time, 90-10%Fall time, Rise time, Fall time, +Burst Width, -Burst Width, +Duty Cycle, -Duty Cycle, Delay, Time@Middle, Cycle-Cycle jitter
Miscellaneous Parameters	+Area@DC, -Area@DC, Area@DC, Absolute Area@DC, +Area@AC, -Area@AC, Area@AC, Absolute Area@AC, Cycles, Rising Edges, Falling Edges, Edges, Positive pulses, Negative pulses, Positive Slope, Negative Slope
Delay Parameters	Phase, FRFR, FRFF, FFFR, FFFF, FRLR, FRLF, FFLR, FFLF, Skew, Tsu@R, Tsu@F, Th@R, Th@F
Statistics	Current, Mean, Min, Max, Sdev, Count, Histogram, Trend, Track
Statistics Count	Unlimited, 1~1024
Cursors	
Source	CH1~CH4, D0~D15, F1~F4, Ref, Histogram
Type	Manual : Time X1, X2, (X1-X2), (1/ΔT); Vertical Y1, Y2, (Y1-Y2) Track: Time X1, X2, (X1-X2) Measure: indicates the measurement on specific parameter

Math	
Trace	F1~F4
Source	CH1~CH4, Z1~Z4, F1~F4
Operation	FFT, Filter, +, -, x, ÷, ∫dt, d/dt, √, Identity, Negation, x , Sign, ex, 10x, ln, lg, Interpolation, Max hold, Min hold, ERES, Average, Formula Editor
FFT	Length: 2 Mpts, 1 Mpts, 512 kpts, 256 kpts, 128 kpts, 64 kpts, 32 kpts, 16 kpts, 8 kpts, 4 kpts, 2 kpts Window: Rectangular, Blackman, Hanning, Hamming, Flattop Display: Full Screen, Split, Exclusive Mode: Normal, Max hold, Average Tools: Peaks, Markers

Analysis	
Search	
Source	CH1~CH4, History
Mode	Edge, Slope, Pulse, Interval, Runt
Copy setting	Copy from trigger, Copy to trigger
Navigate	
Type	Search event, Time, History frame
Mask Test	
Source	CH1 ~ CH4 , Z1 ~ Z4
Mask creating	Auto (Create mask), Customized (Mask Editor)
Mask test speed	Up to 80,000 frames/s

Bode Plot	
Source	CH1 ~ CH4
Supported signal sources	SAG1021I (Connection: USB), SDG series waveform generators (Connection: USB, LAN)
Sweep type	Simple, Vari-level
Frequency	Mode: Linear, Logarithmic Range: 10 Hz ~ 120 MHz
Measure	Upper cutoff frequency, Lower cutoff frequency, Bandwidth, Gain margin, Phase margin
Power Analysis (optional)	
Measure	Power quality, Current Harmonics, Inrush current, Switching loss, Slew rate, Modulation, Output ripple, Turn on/turn off, Transient response, PSRR, Efficiency, SOA
Histogram	
Source	CH1 ~ CH4
Type	Horizontal, Vertical, Both
Counter	
Source	CH1 ~ CH4
Frequency resolution	7 digits
Totalizer	Counter on edges, supports Gate and Trigger

Digital Channels (optional)	
Max. Sampling Rate	1 GSa/s
Memory Depth	10 Mpts/ch
Min. Detectable Pulse Width	3.3 ns
Level Group	D0~D7, D8~D15
Level Range	-8 V~8 V
Logic Type	TTL, CMOS, LVCMOS3.3, LVCMOS2.5, Custom
Skew	D0~D15: ± 1 sampling interval Analog to Digital(Triggered On Digital): $\pm (1 \text{ sampling interval} + 1 \text{ ns})$ Digital to Analog(Triggered On Analog): $\pm 4 \text{ ns}$

USB AWG Module (optional)	
Channels	1
Max. Output Frequency	25 MHz
Sampling Rate	125 MSa/s
Frequency Resolution	1 μHz
Frequency	$\pm 50 \text{ ppm}$

Accuracy	
Vertical Resolution	14 bit
Amplitude Range	-1.5 V ~ +1.5 V (into 50 Ω) -3 V ~ +3 V (into High-Z)
Waveforms	Sine, Square, Ramp, Pulse, DC, Noise, 45 Arbitrary
Output Impedance	50 Ω ± 2%
Protection	Over voltage protection, Current limit
Sine	
Frequency	1 μHz ~ 25 MHz
Offset accuracy (10 kHz)	±(1%*offset setting value +3 mVpp)
Amplitude flatness	±0.3 dB, compare to 10 kHz, 2.5 Vpp into 50 Ω
SFDR	DC ~ 1 MHz -60 dBc 1 MHz ~ 5 MHz -55 dBc 5 MHz ~ 25 MHz -50 dBc
Harmonic distortion	DC ~ 5 MHz -50 dBc 5 MHz ~ 25 MHz -45 dBc
Square/Pulse	
Frequency	1 μHz ~ 10 MHz
Duty cycle	1% ~ 99%
Edge	< 24 ns (10% ~ 90%)
Overshoot	< 3% (typical , 1 kHz, 1 Vpp)
Pulse width	> 50 ns
Jitter (cycle-cycle)	< 500 ps + 10 ppm
Ramp	
Frequency	1 μHz ~ 300 kHz
Linearity	< 0.1% of Pk-Pk (typical, 1 kHz, 1 Vpp, 50% symmetry)
Channels	0% ~ 100%
DC	
Offset range	±1.5 V (into 50 Ω) ±3 V (into Hi-Z)
Accuracy	±(setting value *1% + 3 mV)
Noise	
Bandwidth (-3 dB)	>25 MHz
Arb	
Frequency	1 μHz ~ 5 MHz
Waveform memory	16 kpts
Sample rate	125 MSa/s
Wave import	From EasyWaveX, from U-disk, directly from waveform data of analog channels

I/O	
Front	USB 2.0 Host, SBUS: Siglent MSO, Calibration Signal: 1 kHz, 3 V Square
Rear	USB 2.0 Host, USB 2.0 Device, LAN: 10/100MbaseT (RJ45), Auxiliary Output: TRIG OUT (3.3 V LVCMOS), PASS/FAIL OUT (3.3 V TTL)

Display	
Display Type	7 TFT LCD with capacitive touch screen
Resolution	1024×600
Contrast (typical)	500:1
Backlight (typical)	500 nit

Display Setting	
Range	8 x 10 grid
Display Type	Dot, Vector
Persistence Time	OFF, 1 s , 5 s , 10 s , 30 s , infinite
Color Display	Normal, Color; Supports customer trace color
Language	Simplified Chinese, Traditional Chinese, English, French, Japanese, German, Spanish, Russian, Italian, Portuguese
Built-in Help System	Simplified Chinese, English

Environmental			
Temperature	Operating: 0 °C ~ 40 °C Non-operating: -30 °C ~ 70 °C		
Humidity	Operating: 5% ~ 90%RH, 30 °C, degraded to 50%RH at 50 °C Non-operating: 5% ~ 95%		
Altitude	Operating: ≤ 3,000 m, 25 °C Non-operating: ≤15,000 m		
Electromagnetic Compatibility	Meets EMC directive (2014/30/EU), meets or exceeds IEC 61326-1:2012/EN61326-1:2013 (Basic)		
	Conducted disturbance	CISPR 11/EN 55011	CLASS A group 1 150 kHz-30 MHz
	Radiated disturbance	CISPR 11/EN 55011	CLASS A group 1 30 MHz-1 GHz

	Electrostatic discharge (ESD)	IEC 61000-4-2/EN 61000-4-2	4.0 kV (Contact), 8.0 kV (Air)
	Radio-frequency electromagnetic field Immunity	IEC 61000-4-3/EN 61000-4-3	10 V/m (80 MHz to 1 GHz); 3 V/m (1.4 GHz to 2 GHz); 1 V/m (2.0 GHz to 2.7 GHz)
	Electrical fast transients (EFT)	IEC 61000-4-4/EN 61000-4-4	2kV (Input AC Power Ports)
	Surges	IEC 61000-4-5/EN 61000-4-5	1kV (Line to line) 2kV (Line to ground)
	Radio-frequency continuous conducted Immunity	IEC 61000-4-6/EN 61000-4-6	3 V, 0.15-80 MHz
	Voltage dips and interruptions	IEC 61000-4-11/ EN 61000-4-11	Voltage Dips: 0% UT during 1 cycle; 40% UT during 10/12 cycles; 70% UT during 25/30 cycles Voltage interruptions: 0% UT during 250/300 cycles
Safety	UL 61010-1:2012/R: 2018-11; CAN/CSA-C22.2 No. 61010-1:2012/A1:2018-11. UL 61010-2-030:2018; CAN/CSA-C22.2 No. 61010-2-030:2018.		
RoHS	EU 2015/863		

Power Supply	
Input Voltage & Frequency	100 ~ 240 Vrms 50/60 Hz
Power consumption	80 W max., 40 W typical, 4 W typical in standby mode

Mechanical	
Dimensions	Length × Height × Width = 312 mm × 151 mm × 132.6 mm (including knobs and supporting legs)
Weight	Net Weight 2.6 kg, Gross Weight 3.8 kg


Ordering Information

Model	Description
SDS824X HD	200 MHz, 2 GSa/s, 4CH
SDS814X HD	100 MHz, 2 GSa/s, 4CH
SDS804X HD	70 MHz, 2 GSa/s, 4CH
SDS822X HD	200 MHz, 2 GSa/s, 2CH
SDS812X HD	100 MHz, 2 GSa/s, 2CH
SDS802X HD	70 MHz, 2 GSa/s, 2CH

Standard Accessories	Quantity
USB cable	1
Quick start	1
Passive probe	1/channel
Certificate of calibration	1
Power cord	1

Optional Accessories	Part No.
AWG Software	SDS800XHD-FG
USB Isolated AWG Module Hardware	SAG1021I
16 Channels MSO Software	SDS800XHD-16LA
16 Channels Logic Analyzer	SLA1016
Power Analysis Software	SDS800XHD-PA
Power Analysis deskew fixture	DF2001A

Accessories

Accessories	Picture	Model	Specifications &Description
Demo Board		STB-3 Test Board	Output signals including square, sine, AM, fast edge, pulse, PWM, I2C, CAN, LIN etc. Used in teaching and demonstrations.
USB Isolated AWG Module		SAG1021I	Output Sine, Square, Ramp, pulse, Noise, DC and 45 built-in waveforms. The arbitrary waveforms can be accessed and edited by the EasyWave PC software.

<p>16 Channels Logic Analyzer</p>		<p>SLA1016</p>	<p>Provides 16 digital channels by connecting the SBUS interface.</p>
<p>Power Analysis deskew fixture</p>		<p>DF2001A</p>	<p>Calibrates the phase between the current and voltage probes.</p>



About SIGLENT

SIGLENT is an international high-tech company, concentrating on R&D, sales, production and services of electronic test & measurement instruments.

SIGLENT first began developing digital oscilloscopes independently in 2002. After more than a decade of continuous development, SIGLENT has extended its product line to include digital oscilloscopes, isolated handheld oscilloscopes, function/arbitrary waveform generators, RF/MW signal generators, spectrum analyzers, vector network analyzers, digital multimeters, DC power supplies, electronic loads and other general purpose test instrumentation. Since its first oscilloscope was launched in 2005, SIGLENT has become the fastest growing manufacturer of digital oscilloscopes. We firmly believe that today SIGLENT is the best value in electronic test & measurement.

Headquarters:

SIGLENT Technologies Co., Ltd
Add: Bldg No.4 & No.5, Antongda Industrial
Zone, 3rd Liuxian Road, Bao'an District,
Shenzhen, 518101, China
Tel: + 86 755 3688 7876
Fax: + 86 755 3359 1582
Email: sales@siglent.com
Website: int.siglent.com

North America:

SIGLENT Technologies America, Inc
6557 Cochran Rd Solon, Ohio 44139
Tel: 440-398-5800
Toll Free: 877-515-5551
Fax: 440-399-1211
Email: info@siglentna.com
Website: www.siglentna.com

Europe:

SIGLENT Technologies Germany GmbH
Add: Staetzlinger Str. 70
86165 Augsburg, Germany
Tel: +49(0)-821-666 0 111 0
Fax: +49(0)-821-666 0 111 22
Email: info-eu@siglent.com
Website: www.siglenteu.com

Follow us on
Facebook: SiglentTech

